

SPN

High Impact/Narrow Fan Spray

DESIGN FEATURES

- One-piece/heavy construction
- Straight-through orifice minimizes clogging
- Machined from bar stock to exacting standards
- Male connection


SPRAY CHARACTERISTICS

- Yields highest impact, narrow flat spray with least atomization
- Spoon-shaped deflector surface efficiently forms a hard-driving spray


Spray pattern: Fan

Spray angles: 15°, 25°, 35°, 40°, 50°

Flow rates: 0.50 to 44.7 gpm

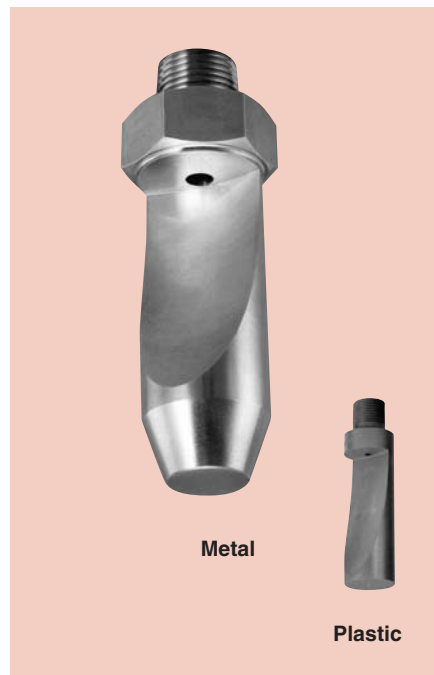

Fan 50°

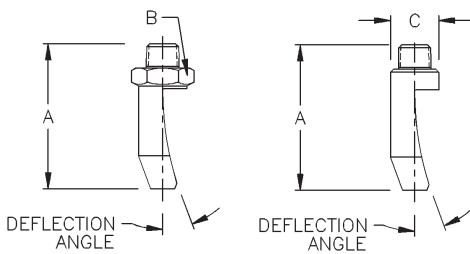

Metal

Plastic

Dimensions are approximate. Check with BETE for critical dimension applications.

SPN Flow Rates and Dimensions

Fan, 15°, 25°, 35°, 40° and 50° Spray Angles, 1/8" to 3/4" Pipe Sizes

Male Pipe Size	Nozzle Number	Available Spray Angles	K Factor	GALLONS PER MINUTE @ PSI										Approx. Orifice Dia. (in.)	Deflection Angle @ Spray Angle	Dimensions (inches)		
				10 PSI	20 PSI	30 PSI	40 PSI	50 PSI	60 PSI	80 PSI	100 PSI	200 PSI	15°			25°	35°	40°
1/8	SPN 04	35°	0.063	0.20	0.28	0.35	0.40	0.45	0.49	0.56	0.63	0.89	0.049	15°		0.70	0.50	0.56
1/4	SPN 10	15° 35° 50°	0.158	0.50	0.71	0.87	1.00	1.12	1.21	1.40	1.58	2.20	0.078	5° 35° 55°	2.00	0.88	0.75	
	SPN 20	15° 35° 50°	0.316	1.00	1.41	1.73	2.00	2.24	2.50	2.80	3.16	4.50	0.109	5° 35° 45°				
	SPN 25	50°	0.395	1.30	1.80	2.20	2.50	2.80	3.10	3.50	3.95	5.60	0.120	50°				
	SPN 40	25° 50°	0.633	2.00	2.83	3.50	4.00	4.47	4.90	5.66	6.33	8.90	0.152	20° 45°				
3/8	SPN 20	35°	0.316	1.00	1.41	1.73	2.00	2.24	2.40	2.83	3.16	4.50	0.109	30°	3.00	1.12	1.00	
	SPN 25	35°	0.395	1.25	1.77	2.17	2.50	2.80	3.06	3.54	3.95	5.59	0.120	28° 45°				
	SPN 30	15° 35°	0.474	1.50	2.12	2.60	3.00	3.35	3.67	4.24	4.74	6.71	0.125	5° 28°				
	SPN 40	15° 35° 40° 50°	0.633	2.00	2.83	3.46	4.00	4.47	4.90	5.66	6.33	9.00	0.152	5° 35° 35° 50°				
	SPN 50	35° 40°	0.791	2.50	3.54	4.33	5.00	5.59	6.12	7.07	7.91	11.2	0.171	23° 33°				
	SPN 60	15° 35° 40° 50°	0.949	3.00	4.24	5.20	6.00	6.71	7.35	8.49	9.49	13.4	0.187	5° 20° 33° 35°				
	SPN 70	40°	1.11	3.50	4.95	6.06	7.00	7.83	8.57	9.90	11.1	15.7	0.199	29°				
	SPN 80	15° 35° 40° 50°	1.26	4.00	5.66	6.93	8.00	8.90	9.80	11.3	12.6	17.9	0.209	5° 25° 26° 35°				
	SPN 90	40°	1.42	4.50	6.36	7.80	9.00	10.1	11.0	12.7	14.2	20.1	0.218	28°				
	SPN 100	15° 35° 40° 50°	1.58	5.00	7.10	8.60	10.0	11.2	12.2	14.1	15.8	22.3	0.234	5° 25° 28° 40°				
	SPN 120	15° 35° 50°	1.90	6.00	8.49	10.4	12.0	13.4	14.7	17.0	19.0	26.8	0.265	5° 25° 40°				
	SPN 125	50°	1.98	6.25	8.84	10.8	12.5	14.0	15.3	17.7	19.8	28.0	0.272	38°				
SPN 160	35° 50°	2.53	8.00	11.3	13.9	16.0	17.9	19.6	23.0	25.3	35.8	0.312	25° 37°					
SPN 200	50°	3.16	10.0	14.2	17.0	20.0	22.4	24.0	28.0	31.6	44.7	0.328	32°					
1/2	SPN 60	15° 35°	0.949	3.00	4.24	5.20	6.00	6.71	7.35	8.49	9.49	13.4	0.187	5° 27°	4.50	1.38	1.25	
	SPN 80	15° 35° 50°	1.26	4.00	5.66	6.93	8.00	8.14	9.80	11.3	12.6	17.9	0.209	5° 25°				
	SPN 100	15° 35°	1.58	5.00	7.10	8.60	10.0	11.2	12.2	14.1	15.8	22.4	0.234	5° 19°				
	SPN 140	15° 35° 50°	2.21	7.00	10.0	12.0	14.0	15.7	17.0	20.0	22.1	32.0	0.296	5° 25° 40°				
	SPN 160	15° 35° 50°	2.53	8.00	11.3	13.9	16.0	17.9	19.5	22.5	25.2	35.5	0.312	5° 25° 40°				
3/4	SPN 160	35°	2.53	8.00	11.3	13.9	16.0	17.9	19.6	22.6	25.3	35.8	0.312	23°	4.88	1.75	1.69	
	SPN 200	15° 35°	3.16	10.0	14.2	17.0	20.0	22.4	24.0	28.0	31.6	44.7	0.328	5° 22°				

$$\text{Flow Rate (GPM)} = K \sqrt{\text{PSI}}$$

Standard Materials: Brass, 303 Stainless Steel, 316 Stainless Steel, PVC and PTFE.

Spray angle performance varies with pressure. Contact BETE for specific data on critical applications.

FAN

TO ORDER: specify pipe size, connection type, nozzle number, spray angle, and material.