

TH

Tangential Inlet/Right Angle



Metal

WHIRL

DESIGN FEATURES

- Large free passage
- Clog-resistant; nozzles have no internal parts
- One-piece construction
- Female connection
- Flanged connection available
- U.S. Patent 4,231,524
- Inlet and outlet are in-line

SPRAY CHARACTERISTICS


- Patented geometry designed to give the most uniform liquid distribution around the periphery of the spray.

Spray pattern: Hollow Cone


Spray angles: Narrow to Medium

Flow rates: 15.3 to 2230 l/min


Silicon carbide requests require review prior to quote/order acceptance. Please contact BETE for information.



Hollow Cone - Narrow Angle

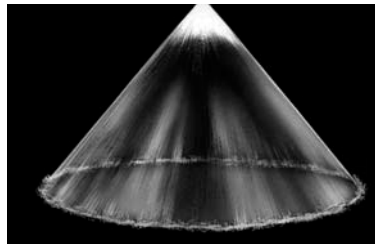

Hollow Cone - Medium Angle

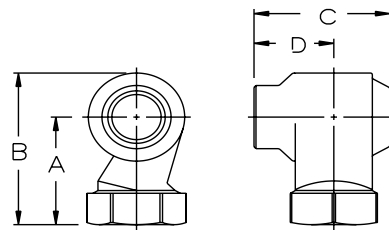

Dimensions are approximate. Check with BETE for critical dimension applications.

TH Flow Rates and Dimensions

Hollow Cone, Narrow to Medium Spray Angles, 1" to 3" Pipe Sizes, BSP or NPT

Female Pipe Size	Nozzle Number	Spray Ang.			K Factor	LITERS PER MINUTE @ BAR							Approx. Orifice Dia. (mm)	Free Pass. Dia. (mm)	Dimensions (mm)				Wt. (kg)	
		0.3 bar	1 bar	3 bar		0.2 bar	0.3 bar	0.5 bar	0.7 bar	1 bar	1.5 bar	2 bar			3 bar	A	B	C		D
1	THF1508	54°	54°	54°	34.2	15.3	18.7	24.2	28.6	34.2	41.9	48.3	59.2	8.73	8.73	58.7	79.2	50.8	26.9	0.18
	THF1808	56°	56°	56°	41.0	18.3	22.5	29.0	34.3	41.0	50.2	58.0	71.0	9.53	9.53					
	THF2308	63°	66°	66°	52.4	23.4	28.7	37.1	43.9	52.4	64.2	74.1	90.8	11.1	11.1					
	THF2708	66°	70°	70°	61.5	27.5	33.7	43.5	51.5	61.5	75.4	87.0	107	11.9	11.9					
	THF3208	68°	72°	71°	72.9	32.6	39.9	51.6	61.0	72.9	89.3	103	126	13.9	13.9					
	THF 3808	68°	72°	71°	86.6	38.7	47.4	61.2	72.5	86.6	106	122	150	15.2	15.2					
1 1/4	THF3210	66°	66°	66°	72.9	32.6	39.9	51.6	61.0	72.9	89.3	103	126	13.9	13.9	73.1	97.8	66.5	38.1	0.54
	THF3810	68°	70°	70°	86.6	38.7	47.4	61.2	72.5	86.6	106	122	150	15.9	15.9					
	THF4110	73°	74°	74°	93.4	41.8	51.2	66.1	78.2	93.4	114	132	162	16.7	16.7					
	THF5210	79°	80°	80°	119	53.0	64.9	83.8	99.1	119	145	168	205	19.8	19.8					
	THF7010	83°	85°	85°	160	71.3	87.4	113	133	160	195	226	276	26.2	22.6					
1 1/2	THF6112	58°	60°	60°	139	62.2	76.1	98	116	139	170	197	241	19.4	19.4	74.7	104	81.8	47.8	1.00
	THF7012	63°	65°	65°	160	71.3	87.4	113	133	160	195	226	276	21.4	21.4					
	THF7712	63°	66°	66°	175	78.5	96.1	124	147	175	215	248	304	23.4	23.4					
	THF9012	67°	70°	70°	205	91.7	112	145	172	205	251	290	355	26.2	26.2					
	THF12712	75°	80°	80°	289	129	159	205	242	289	354	409	501	32.9	27.0					
	THF14512	80°	80°	83°	330	148	181	234	276	330	405	467	572	36.1	27.0					

$$\text{Flow Rate (l/min)} = K \sqrt{\text{bar}}$$

Standard Materials: Brass, Carbon Steel and 316 Stainless Steel.

Spray angle performance varies with pressure. Contact BETE for specific data on critical applications.

TO ORDER: specify pipe size, connection type, nozzle number, spray angle, and material.



Silicon Carbide, Flanged

For more effective distribution of multiple nozzle arrays, BETE junction boxes can be used. See page 108 for more detailed information.

Junction Box



Silicon carbide requests require review prior to quote/order acceptance. Please contact BETE for information.

Dimensions are approximate. Check with BETE for critical dimension applications.



CALL 413-772-0846
Call for the name of your nearest BETE representative.

TH Flow Rates and Dimensions
Hollow Cone, Narrow to Medium Spray Angles, 1" to 3" Pipe Sizes, BSP or NPT

Female Pipe Size	Nozzle Number	Spray Ang.			K Factor	LITERS PER MINUTE @ BAR								Approx. Orifice Dia. (mm)	Free Pass. Dia. (mm)	Dimensions (mm)				Wt. (kg)
		0.3 bar	1 bar	3 bar		0.2 bar	0.3 bar	0.5 bar	0.7 bar	1 bar	1.5 bar	2 bar	3 bar			A	B	C	D	
2	THF8516	63°	65°	65°	194	86.6	106	137	162	194	237	274	336	21.8	21.8	91.9	130	106	62.7	1.81
	THF10516	65°	67°	67°	239	107	131	169	200	239	293	338	414	25.4	25.4					
	THF12516	68°	70°	70°	285	127	156	201	238	285	349	403	493	29.0	29.0					
	THF14516	74°	79°	79°	330	148	181	234	276	330	405	467	572	32.1	32.1					
	THF17016	77°	80°	80°	387	173	212	274	324	387	474	548	671	35.3	35.3					
	THF19216	77°	80°	80°	438	196	240	309	366	438	536	619	758	38.5	36.5					
	THF20516	77°	83°	83°	467	209	256	330	391	467	572	661	809	41.3	36.5					
	THF23016	76°	83°	83°	524	234	287	371	439	524	642	741	908	44.5	36.5					
2 1/2	THF17020	85°	85°	85°	387	173	212	274	324	387	474	548	671	33.7	33.7	125	172	133	77.7	2.90
	THF19020	70°	73°	73°	433	194	237	306	362	433	530	612	750	36.1	36.1					
	THF20520	72°	75°	73°	467	209	256	330	391	467	572	661	809	37.3	37.3					
	THF23020	76°	78°	78°	524	234	287	371	439	524	642	741	908	40.1	40.1					
	THF28020	79°	80°	80°	638	285	349	451	534	638	781	902	1105	46.0	44.5					
	THF32020	83°	85°	85°	729	326	399	516	610	729	893	1031	1263	51.2	44.5					
	THF34020	87°	90°	90°	775	347	424	548	648	775	949	1096	1342	53.2	44.5					
	THF43520	92°	95°	95°	991	443	543	701	829	991	1214	1402	1717	61.9	44.5					
3	THF18524	58°	58°	58°	422	189	231	298	353	422	516	596	730	32.5	32.5	145	200	153	88.9	4.08
	THF23024	65°	65°	65°	524	234	287	371	439	524	642	741	908	36.5	36.5					
	THF28024	70°	70°	70°	638	285	349	451	534	638	781	902	1110	41.3	41.3					
	THF32024	65°	70°	70°	729	326	399	516	610	729	893	1030	1260	45.2	45.2					
	THF34024	68°	70°	70°	775	347	424	548	648	775	949	1100	1340	46.8	46.8					
	THF41224	75°	78°	78°	939	420	514	664	786	939	1150	1330	1630	53.6	53.6					
	THF46924	75°	80°	80°	1070	478	585	756	894	1070	1310	1510	1850	57.9	54.0					
	THF52624	78°	80°	80°	1200	536	657	848	1000	1200	1470	1700	2080	63.1	54.0					
THF56424	78°	80°	80°	1290	575	704	909	1080	1290	1570	1820	2230	65.9	54.0						

Flow Rate (l_{min}) = $K \sqrt{bar}$

Standard Materials: Brass, Carbon Steel and 316 Stainless Steel.

Spray angle performance varies with pressure. Contact BETE for specific data on critical applications.