

## "A" "A" PLAN W/O LID

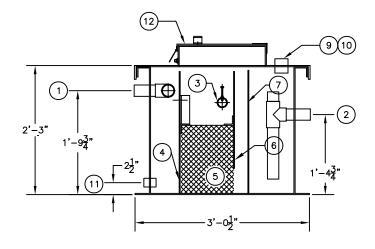

SECTION "A-A"

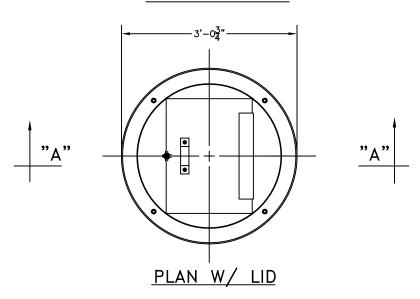

## ASSEMBLY LIST

- 1) 2" ø INLET, PIPE STUB
- 2 2" ø OUTLET, PIPE STUB
- (3) 2" Ø ROTARY PIPE SKIMMER/OIL OUTLET, PIPE STUB
- 4 INLET BAFFLE
- 5 VERTICAL TUBE COALESCERS
- 6 OIL RETENTION BAFFLE
- 7 WEIR WALL
- (8) EFFLUENT CHAMBER
- 9 N/A
- 10 N/A
- 11 1" Ø DRAIN COUPLING, FNPT W/ PLUG
- 12) 2'-0" x 1'-6" MANWAY

## NOTES

- 1. WITHOUT WRITTEN CONSENT FROM AFL INDUSTRIES, INC., DO NOT:
- A. DRILL HOLES OR OTHERWISE PUNCTURE THE FIBERGLASS SKINS OF THE UNIT.
- B. MOUNT ANY EQUIPMENT OR ACCESSORY ON THE UNIT.
- C. REMOVE ANY EQUIPMENT OR ACCESSORY FROM THE UNIT.
- D. FLOOD THE UNIT OR RESTRICT THE OUTFLOWS.
- 2. AFL REQUIRES A FLEXIBLE COUPLING TO BE INSTALLED BETWEEN THE TANK AND CUSTOMER'S CONNECTING PIPES TO ELIMINATE EXCESSIVE LOADING ON TANK FLANGES.
- 3. DIMENSIONAL TOLERANCE ± 1/2".
- 4. ALL TANK FLANGES FURNISHED BY AFL ARE 150# FLAT FACE FLANGES.
- 5. ALL NOZZLE PROJECTIONS ARE 4" UNLESS NOTED OTHERWISE.
- 6. ALL FLANGE BOLT HOLE PATTERNS TO STRADDLE CENTERLINES.

