
3'-5½" 1'-11¾" 3'-5½" 2 "A" 1'-8 3/4"

PLAN W/O LID

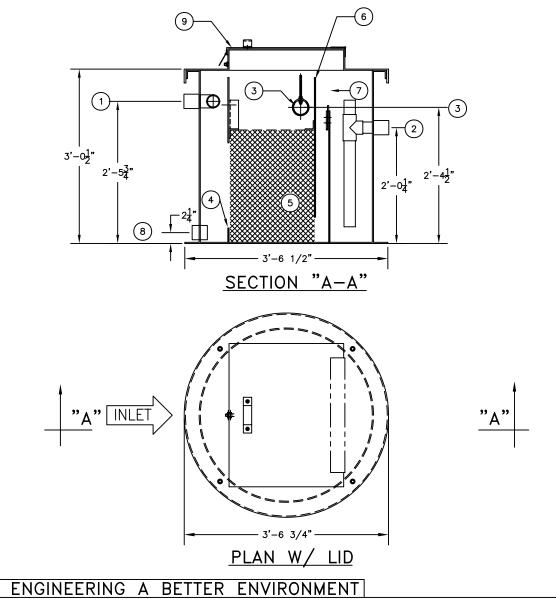

ASSEMBLY LIST

- 1) 2" Ø INLET, PIPE STUB
- 2 2" ø OUTLET, PIPE STUB
- (3) 3" Ø ROTARY PIPE SKIMMER/OIL OUTLET, PIPE STUB
- (4) INLET BAFFLE
- (5) VERTICAL TUBE COALESCERS
- 6 OIL RETENTION BAFFLE
- 7 WEIR WALL
- (8) 1" ø DRAIN COUPLING, FNPT W/ PLUG
- (9) 2'-6" x 2'-0" MANWAY

NOTES

- WITHOUT WRITTEN CONSENT FROM AFL INDUSTRIES, INC., DO NOT:
 - A. DRILL HOLES OR OTHERWISE PUNCTURE THE FIBERGLASS SKINS OF THE UNIT.
 - B. MOUNT ANY EQUIPMENT OR ACCESSORY ON THE UNIT.
 - C. REMOVE ANY EQUIPMENT OR ACCESSORY FROM THE UNIT.
 - D. FLOOD THE UNIT OR RESTRICT THE OUTFLOWS.
- 2. AFL REQUIRES A FLEXIBLE COUPLING TO BE INSTALLED BETWEEN THE TANK AND CUSTOMER'S CONNECTING PIPES TO ELIMINATE EXCESSIVE LOADING ON TANK FLANGES.
- 3. DIMENSIONAL TOLERANCE ± 1/2".
- 4. ALL TANK FLANGES FURNISHED BY AFL ARE 150# FLAT FACE FLANGES.
- 5. ALL NOZZLE PROJECTIONS ARE 4" UNLESS NOTED OTHERWISE.
- 6. ALL FLANGE BOLT HOLE PATTERNS TO STRADDLE CENTERLINES.

