

ASSEMBLY LIST


- (1) 3" ø INLET, PIPE STUB
- (2) 3" ø OUTLET, PIPE STUB
- (3) 3" ø rotary pipe skimmer/oil outlet, pipe stub
- (4) INLET BAFFLE
- (5) VERTICAL TUBE COALESCERS
- (6) OIL RETENTION BAFFLE
- 7 WEIR WALL
- 8 1" ø DRAIN COUPLING, FNPT W/ PLUG
- (9) 2'-6" x 3'-0" MANWAY

- **NOTES**
- 1. WITHOUT WRITTEN CONSENT FROM AFL INDUSTRIES, INC.,
 - A. DRILL HOLES OR OTHERWISE PUNCTURE THE FIBERGLASS SKINS OF THE UNIT.
 - B. MOUNT ANY EQUIPMENT OR ACCESSORY ON THE UNIT.
 - REMOVE ANY EQUIPMENT OR ACCESSORY FROM THE UNIT.
 - D. FLOOD THE UNIT OR RESTRICT THE OUTFLOWS.
- 2. AFL REQUIRES A FLEXIBLE COUPLING TO BE INSTALLED BETWEEN THE TANK AND CUSTOMER'S CONNECTING PIPES TO ELIMINATE EXCESSIVE LOADING ON TANK FLANGES.
- 3. DIMENSIONAL TOLERANCE ± 1/2".
- ALL TANK FLANGES FURNISHED BY AFL ARE 150# FLAT FACE FLANGES.
- 5. ALL NOZZLE PROJECTIONS ARE 4" UNLESS NOTED OTHERWISE.
- 6. ALL FLANGE BOLT HOLE PATTERNS TO STRADDLE CENTERLINES.

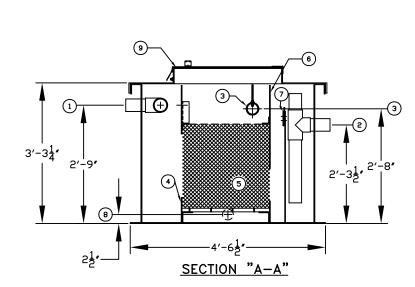

PLAN W/O LID

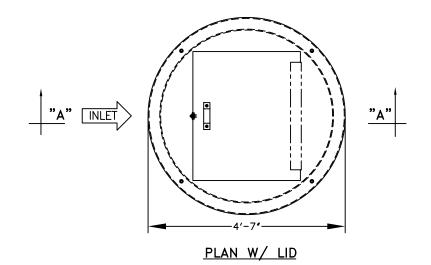



ENGINEERING A BETTER ENVIRONMENT

①||