



EMAIL: FILTRATION@JOHNBROOKS.CA



HMW Series Filter Cartridges

Absolute Rated Polyethersulfone Membrane Filter Cartridges

The HMW Series is constructed of absolute rated, hydrophilic, asymmetric polyethersulfone membrane and polypropylene components. The filter is designed for overall filtration economy and provides excellent flow rates and throughputs.

Product Specifications

Media: Asymmetric Polyethersulfone Membrane

Inner core, end caps, cage: Polypropylene

Support layers: Spunbonded Polypropylene

Gaskets/O-Rings:

Buna-N, EPDM, Silicone, Teflon Encapsulated Viton (O-Rings only), Viton

Micron ratings: 0.05, 0.1, 0.2, 0.45, 0.65 μm

Dimensions

Nominal lengths:

5" 9.75" 10" 20" 30" 40"
12.7 24.8 25.4 50.8 76.2 101.6 cm

Outside diameter: 2.7" (6.9 cm)

Inside diameter: 1.0" (2.54 cm)

Surface area: 6.0 ft² (0.56 m²) per 10" element

Operating Parameters

Maximum sustained operating temperature:

176°F (80°C) at 20 psid (1.38 bar)

Maximum differential pressure:


75 psid @ 70°F (5.2 bar @ 21°C)
30 psid @ 176°F (2.0 bar @ 80°C)

Maximum reverse differential pressure:

40 psid @ 70°F (2.8 bar @ 21°C)

Recommended change-out pressure:

35 psid (2.4 bar)



FEATURES & BENEFITS

- Low pressure drop reduces energy costs
- High dirt holding capacity minimizes change-outs and down time
- All thermal bonded construction with no adhesives
- Available in all common configurations to allow use of existing filter housings
- Cost-effective absolute filtration

CERTIFICATIONS

- USP Class VI: Meets USP Class VI Biological Test for Plastics
- FDA Listed Materials: All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, 177.1520, and 177.2440 as applicable for food and beverage contact.
- European Directive for Food Contact: European Regulation No. 1935/2004 and European Regulation 10/2011: Tested for migration behavior and is suitable for contact with all kinds of foodstuffs with minimal rinse-up. Data available upon request.

TYPICAL APPLICATIONS

- General water filtration
- DI water post filter
- DI water prefilter
- Aqueous based chemical processing

PERFORMANCE SPECIFICATIONS

- Cleaning/Sanitization: Compatible with most common chemical cleaning, sanitizing and sterilizing agents and with pH range from 1–14. Consult factory for specific compatibility information.
- Steam/Autoclave: Cartridges may be autoclaved for 30 minutes at 250 °F (121°C) under no end load conditions. Cartridges fitted with steam insert may be steamed for at least 10 thirty-minute cycles @ 275°F (135°C) not to exceed 3 psid (0.21 bar).


HMW NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)		Nominal Length (inches)		End Configuration		Gasket or O-Ring		Options
HMW Series	0.05	0.45	-5	-20	P	Double Open End	B	Buna-N	-I End Cap Insert
	0.1	0.65	-9.75*	-30	P2	226/Flat Single Open End	E	EPDM	
	0.2				P3	222/Flat Single Open End	S	Silicone	-R Factory Pre-Rinse
					P7	226/Fin Single Open End	T	Teflon encap. Viton (O-Rings only)	
					P8	222/Fin Single Open End	T	Teflon Gasket	
				AM	Single Open End, Internal O-Ring	V	Viton		
Example: HMW 0.2-10P2E-R					NPC	Double Open End, Internal O-Ring			
HMW	0.2		-10		P2		E		-R

*Available only for DOE (P) configuration

HMW FLOW RATE

Typical Flow Rate Clean Water at Ambient Temperature (per 10" cartridge)

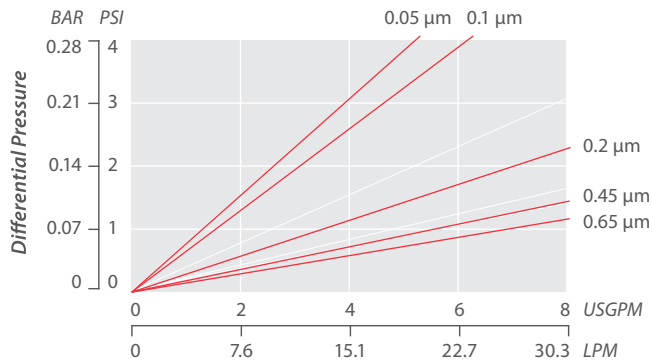

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise



**SPRAYING
PUMPING
FILTERING
AND VALVES**

1-877-624-5757
www.johnbrooks.ca