


# 3M™ NB Series Filter Bags

## Polypropylene Felt and Polyester Felt Bags

3M offers a line of Size #1 and #2 polypropylene felt and polyester felt filter bags in grades ranging from 1 to 200 µm in various collar/media configurations (see ordering guide) with the following important benefits:

- **Inside-Outside Flow Configuration**, resulting in the capture of contaminants on the inside
- **Ease of Handling**: bags are collapsible
- **Ability to handle viscous fluids**
- **Low unit cost**

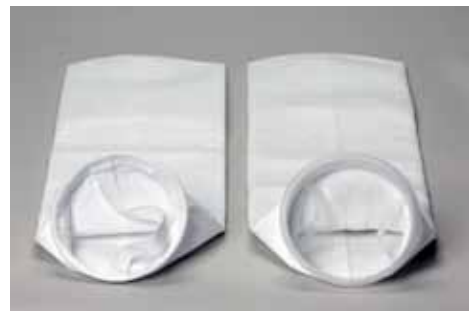

Meeting the most demanding customer specifications, the 3M™ NB series filter bags are highly reliable with predictable and repeatable performance. Features include:

### Media Migration Control

Media migration is controlled through thermal treatment of the exterior surface of the filter media and the use of state-of-the-art procedures to properly weld the media seams and affix the media to the collar.

### Proper Sealing

Proper sealing of the bag in the filter housing is necessary for prevention of fluid bypass and subsequent contamination of the downstream fluid. 3M NB series filter bags are offered in both plastic and metal ring sealing collar versions. For plastic collar versions, the filter bag media is welded to a specially designed plastic collar for proper sealing of the 3M NB series filter bags in most conventional bag housings. The plastic collar incorporates an ergonomically designed handle allowing for easy removal of the filter bag from the filter housing. For ease of identification and traceability, the handles include an engraving with micron grade and manufacturing lot information. Ring collar versions use a galvanized steel ring for sealing the 3M NB series filter bag in the housing. These versions are appropriate for use in most filter bag housings that will not accept the plastic collar version.

### Materials/Construction

Each felt filter bag grade is manufactured from high performance fibers selected based on extensive media performance testing. No adhesives, binders or silicone are used in the media manufacturing process. All polypropylene grades and specific polyester grades use materials that are listed for food contact per 21 CFR. The quality management system associated with the manufacturing of the 3M NB series filter bags is ISO 9001:2008 certified.

Markets Served
Industrial
Chemicals
Coatings
Hydrocarbon & Refining
Electronics
Food & Beverage*
Pharmaceutical & Healthcare*

\* Metal ring version is not recommended

## Features & Benefits

### Controlled Media Specifications

- Predictable performance for desired filter effluent quality
- Manufacturing processes do not include the use of silicone or adhesives

### Specially Designed Sealing Collars

- Proper sealing into most filter bag manufacturers' housings
- Handle designs allow for insertion of bag accessories (displacement balloons, magnets, etc.)
- Grade and lot information included for identification and traceability

### Welded Side Seams And Thermal Treated Exterior Surfaces

- Control of fiber migration and subsequent downstream fluid contamination



Table 1. Filter Bag Specifications		
Dimension	#1 Size	#2 Size
Filter Diameter	7 in / 17.8 cm	
Filter Length	17 in / 43.2 cm	32 in / 81.3 cm


Table 2. Felt Filter Media Chemical Compatibility*		
Chemical	Compatibility Rating	
	Polypropylene	Polyester
Strong Acids	Excellent	Good
Weak Acids	Excellent	Excellent
Strong Alkalis	Excellent	Poor
Weak Alkalis	Excellent	Fair
Solvents	Fair	Good

Table 3. Filter Bag Operating Parameters		
Operating Conditions	Media	
	Polypropylene	Polyester
Maximum Operating Temperature	180 °F (82 °C)	300 °F (149 °C)
Maximum Recommended Flow Rate (gpm/lpm)**	#1 Size 90 gpm (340 lpm)	
	#2 Size 180 gpm (681 lpm)	
Maximum Forward Differential Pressure	35 psid @ 68°F (2.4 bar @ 20°C)	
Recommended Change-out Differential Pressure	20 psid (1.4 bar)	
CFR Compliant	All polypropylene component materials and specific grades of the polyester versions are listed for food contact per 21 CFR 177.1630	

\*Thermal and chemical resistance data presented in this brochure is for guidance only. Factors such as duration, degree of concentration of a substance in a fluid and temperature should also be considered. For each application, the chemical compatibility of the galvanized steel ring should be tested under application conditions such as time, temperature, and environment.

\*\*For aqueous solutions (1 cps) based on maintaining clean pressure drop (media only) of <2 psid (0.14 bar).

## 3M™ NB Series Polypropylene Felt & Polyester Felt Filter Bag Ordering Guide

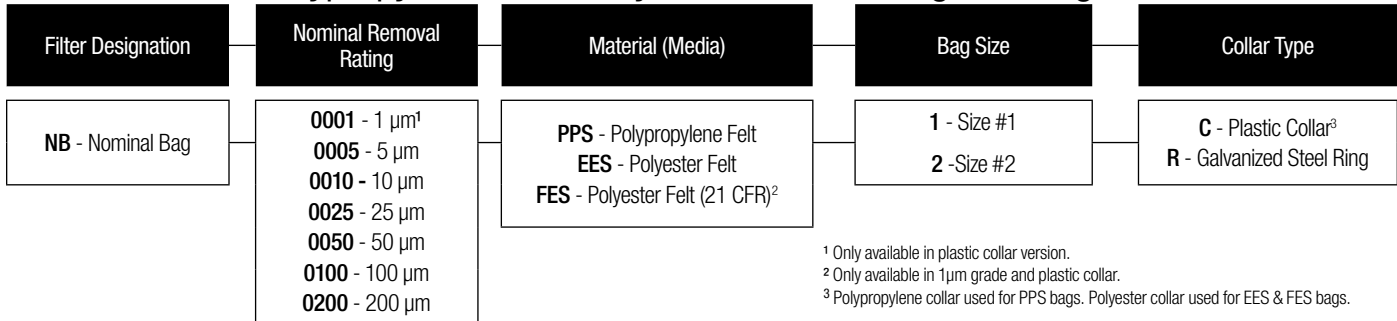

To aid bag installation, an optional bag installation tool is available, order part number 6042931

**Technical Information:** The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

**Product Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

**Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**3M Purification Inc.**  
 400 Research Parkway  
 Meriden, CT 06450, U.S.A.  
 Tel (800) 243-6894  
 (203) 237-5541  
 Fax (203) 630-4530  
 www.3Mpurification.com

3M is a trademark of 3M Company.  
 © 3M 2014. All rights reserved.  
 70020211358 REV 0614

Your Local Distributor: