

# 3M™ High Flow HFM Series Filter Cartridges

3M™ High Flow HFM Series filter cartridges are high flow capacity, high efficiency, outside to inside flow direction liquid filtration cartridges designed for applications with large flow or contaminant removal requirements.

The 3M High Flow HFM Series cartridges are for use in filter housings that accept the standard 3M High Flow filter cartridges.

The large diameter, pleated depth media cartridge design permits higher flow rates than standard 2.5" diameter filter cartridges resulting in significantly fewer required filter cartridges for a given flow.

The 5 micron (nominal) rated HFM Series cartridges utilize a 3M polypropylene microfiber media specifically designed for use in process fluid applications containing organic and/or biological contaminants. The media design helps prevent premature blinding of the filter's outer surface promoting fuller utilization of the media resulting in an optimum combination of particle removal efficiency and contaminant holding capability.

Figure 1 shows test results from challenging the High Flow HFM Series filter cartridge and the standard comparable efficiency High Flow filter cartridge with a surface (lake) water. Surface waters tend to contain high levels of biological and organic contaminants which have a tendency to foul surface filters. The results showed that, on average, the High Flow HFM Series filter cartridge provided over twice the lifetime and held approximately five times the contaminant amount (by weight) versus the standard High Flow filter cartridge, while having similar initial particle removal efficiencies for particles larger than 5 micron.



3M microfiber media is pleated in a radial design which optimizes the usable surface area of the filter cartridges. 3M High Flow HFM Series cartridges utilize polypropylene end caps, outer sleeve and core to help protect the pleat structure integrity and provide a robust filter construction.

## Features & Benefits

### Higher Flow Capability per Cartridge (vs. conventional 2.5" diameter cartridges)

- Fewer cartridges required, resulting in:
  - Reduced cartridge handling
  - Less individual cartridge seal points reducing chance of fluid bypass

### Radial Pleat Design

- High contaminant capacity

### Use of Specially Designed 3M Microfiber Filtration Media

- Helps prevent premature media blinding due to organic/biological contaminants
- High particle removal efficiencies throughout filter life

### Easy to Use

- No special tools or hardware required for filter change-out

### All Polypropylene Filter Construction

- Broad chemical compatibility

### FDA Compliant

- Compatible in applications requiring direct food contact in food and beverage processing per 21 CFR



## Applications

Process Waters

Injection & Produced Waters


Ground/Reclaimed/Waste Waters

Machine Coolants

Pre-RO Water

Boiler Condensate

Refining (Amine, Final Product...)

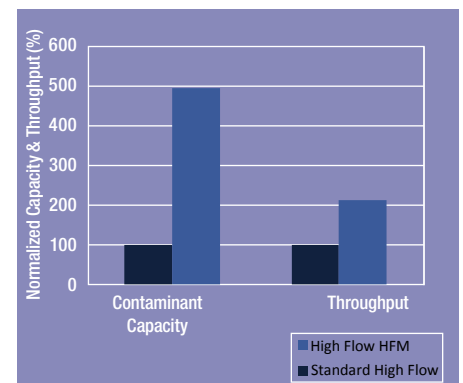

**Figure 1: Lake Water Test Results\***

\* Tests run at the specified maximum flow rate for the filters up to a terminal pressure of 35 psid. Actual filtration performance will depend on the type, size, distribution, and the physical properties of the contaminants as well as flow conditions.




# 3M™ High Flow HFM Series Cartridge Specifications

Construction	
Filter Housing	3M High Flow Series
Filter Media, Center Core, End Caps, Outer Sleeve	Polypropylene
Sealing O-ring	Nitrile <sup>1</sup>
O-ring Size	338
Operating Conditions	
Maximum Flow Rate	85 gpm (19.3 m <sup>3</sup> /hr) – 10" Length 350 gpm (79.5 m <sup>3</sup> /hr) – 40" Length 500 gpm (113.6 m <sup>3</sup> /hr) – 60" Length
Maximum Operating Temperature	160° (71°C)
Maximum Forward Differential Pressure	50 psid @ 68°F (3.4 bar @ 20°C)
Recommended Change-out Differential Pressure	35 psid @ 68° (2.4 bar @ 20°C)
Cartridge Dimensions	
Inside Diameter (nominal)	3.0" (76.2 mm)
Outside Diameter (nominal)	6.0" (152.4 mm)
Length (nominal)	10" (254 mm) 40" (1016 mm) 60" (1524 mm)
Regulatory	
All component materials of construction are listed for food contact per FDA 21 CFR Parts 170-199	

<sup>1</sup> Contact factory regarding availability of other o-ring materials

Graph 1: 10", 40" & 60" High Flow HFM Series

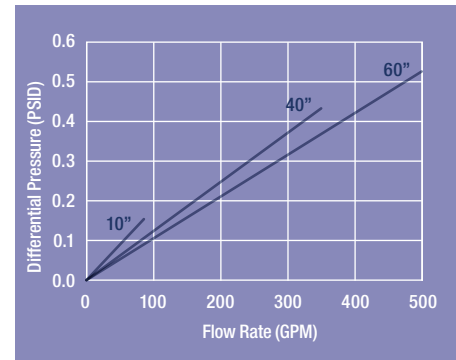

## 3M™ High Flow HFM Series Cartridge Ordering Guide

Filter Designation	Cartridge Length	Material (Media/Plastic Components)	Removal Rating (Nominal Micron)	O-ring
HFM – High Flow HFM Series	10 – 10" 40 – 40" 60 – 60"	PP – Polypropylene	N05 – 5μ (nominal)	D – Nitrile

3M ID Information:	
HFM10PPN05D	70020300680
HFM40PPN05D	70020284363
HFM60PPN05D	70020295245

**Important Notice**

The information described in this literature is accurate to the best of our knowledge. A variety of factors, however, can affect the performance of the Product(s) in a particular application, some of which are uniquely within your knowledge and control. **INFORMATION IS SUPPLIED UPON THE CONDITION THAT THE PERSONS RECEIVING THE SAME WILL MAKE THEIR OWN DETERMINATION AS TO ITS SUITABILITY FOR THEIR USE. IN NO EVENT WILL 3M PURIFICATION INC. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE WHATSOEVER RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION.**

It is your responsibility to determine if additional testing or information is required and if this product is fit for a particular purpose and suitable in your specific application. **3M PURIFICATION INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.**

**Limitation of Liability**

3M Purification Inc. will not be liable for any loss or damage arising from the use of the Product(s), whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you.



**3M Purification Inc.**  
400 Research Parkway  
Meriden, CT 06450  
U.S.A.  
Phone (800) 243-6894  
(203) 237-5541  
Fax (203) 630-4530  
www.3Mpurification.com

Your Local Distributor:

Please recycle. Printed in U.S.A.  
3M is a trademark of 3M Company.  
© 2013 3M Company. All rights reserved.  
70020303437 REV 0513